


AVE Audio


Digitally Steerable Column Speaker
Ascolto[®]

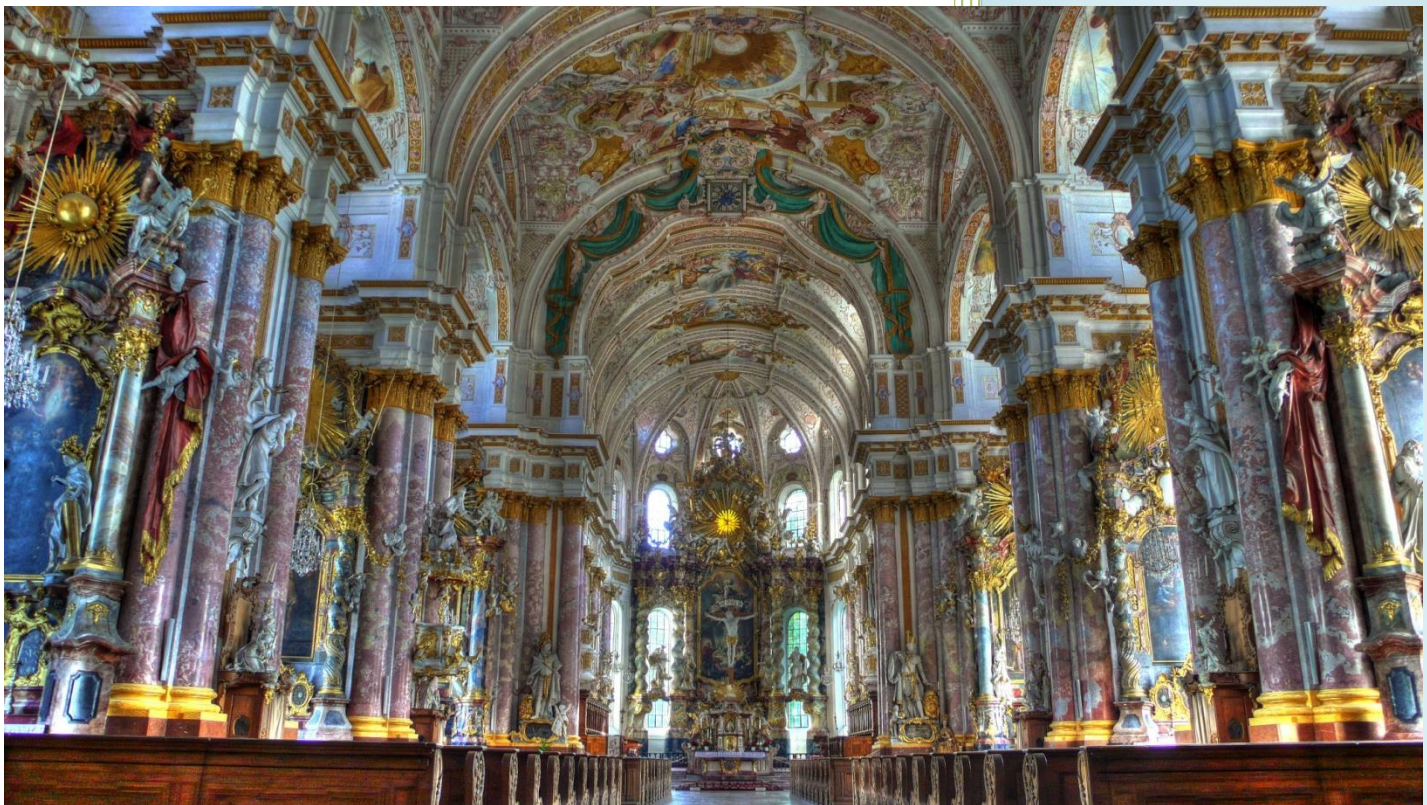

A.V.E. GmbH

Audio Vertriebs-Entwicklungsgesellschaft

Germany

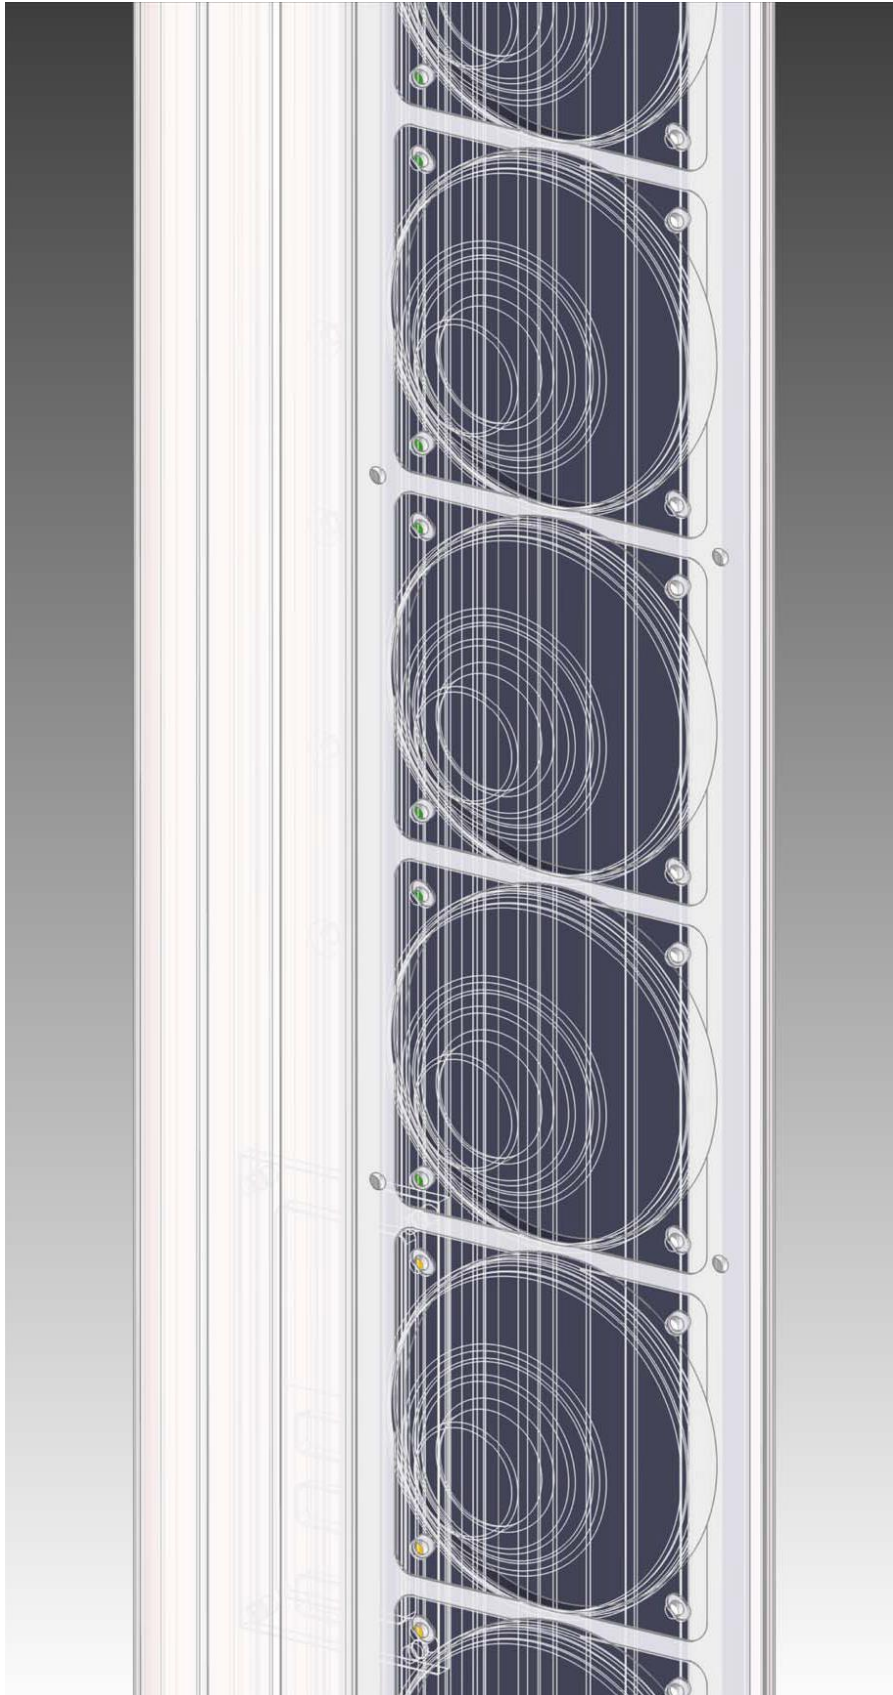

**Digitally
Steerable
Column
Speaker**
Ascolto[®]

**FF0870
Datasheet**

Table of Contents

1. **Acoustic Specifications**
2. **Electrical Specifications**
3. **General Specifications**
4. **Vertical Beam Pattern**
5. **Vertical Beam Width**
6. **Horizontal Beam Width**

1.0 – Acoustic Specifications

Frequency Bandwidth

80 Hz to 20 kHz (± 2 dB)

Maximal SPL

125 dB (A-Weighted at 1 m)

Nominal SPL

109 dB (A-Weighted at 1 m),
103 dB (A-Weighted at 10 m),
100 dB (A-Weighted at 20 m),
98 dB (A-Weighted at 30 m)

Coverage

Horizontal (fixed)	110° (-6 dB average 500 Hz to 8 kHz)
Vertical (adjustable)	Tilting Up/Down Angle: -60° to 60° in 0.1° intervals Opening Angle: 20° to 40° in 0.1° intervals
Typical Throw	20 m
Maximum Throw	25 m

Dynamic Range

102 dB (f=1 kHz, AES17 filter)

Transducers Type

Number	8 Coaxial Loudspeakers
Diameter	4.0" Woofer + 1.0 Dome Tweeter
Magnets	Neodymium

2.0 – Electrical Specifications

Audio Input 1: Line 0 dBu

Input Level Nominal	0 dBu (2.19 V _{pp})
Input Level Maximum	10 dBu (6.92 V _{pp})
Type	Balanced
Impedance	20 kΩ at 1 kHz

Audio Input 2: 100 V (not available in Ascolto – Dante Series)

Input Level Nominal	39.2 dBu (200 V _{pp})
Type	Balanced with Transformer
Impedance	20 kΩ at 1 kHz

Audio Input 3: Dante Audio Networking (available only in Ascolto – Dante Series)

Network	Dante Audio over IP
Transport Layer	Ethernet
Dante Latency	1, 2, or 5 ms (configurable using Dante Controller)
Support for AES67	Yes
Sample Rates	48 kHz
Bit Depths	24

Power Amplifiers

Type	PWM (Class D)
Output Power	8 × 70 W _{rms}
Power Efficiency	92%
THD+N	0.025% at 10 W _{rms/channel} , 1 kHz
Input Signal	Balanced
Channel Protections	Thermal Shutdown (T _{junction} > 150°C)

Output Short Circuit

DSP Module	
DSP Processors	48 bit Fixed Point DSP 76-bit Internal Accumulator 145 MHz
Sample Rate	48 kHz
A/D Conversion	Resolution: 24 bit Linear PCM Conversion: 1-bit delta-sigma 512x Sample Rate: 48 kHz SNR: 112 dB (A-Weighted)
D/A Conversion	Resolution: 24 bit Linear PCM Conversion: upsampling 128x Sample Rate: 48 kHz SNR: 105 dB (A-Weighted)
Signal Processing	Beam Forming Filtering Input Equalization (10 Biquad) Volume (-120 dB _{FS} to 0 dB _{FS}) Delay (0 m to 50 m, step 0.1 m) Dynamic Compressor 2-Bands Input Signal Activity Detector
Control Module	
Processor	32 bit ARM-Cortex M3 RISC 50 MHz
Setup Network Interface	RS485, Half Duplex, 115200 baud/s 120 Ω Parallel Termination (recommended for long distance)

	This network interface is used by AVE Line Array User Control software to manage beam setup and other audio features.
Dante Network Interface	Ethernet, 100 Mbit/s (available only in Ascolto – Dante Series).
Processor Activities	<p>DSP Firmware Booting</p> <p>DSP Status Monitoring</p> <p>PWM Power Amplifier Functions Controlling</p> <p>PWM Power Amplifier Status Monitoring</p> <p>Audio Input Channel Functions Controlling</p> <p>Dante-Chip Ultimo XXT Control (in Ascolto – Dante Series)</p> <p>Auto Stand-By Controlling</p> <p>RS485 Communication</p> <p>Infrared Communication</p> <p>Panel LEDs Controlling</p> <p>Firmware Updating</p>

Connectors

Audio Inputs Connector	3-pole, 3.81 mm-pitch
Audio Inputs Pinout	<p>pin 1: hot signal (+)</p> <p>pin 2: cold signal (-)</p> <p>pin 3: earth (chassis ground)</p>
RS485 Network Connector	3-pole, 3.81 mm-pitch
RS485 Network Pinout	<p>pin 1: data +</p> <p>pin 2: data -</p> <p>pin 3: digital ground</p>
Dante Network Connector	8 pin Ethernet RJ45, female connector
Mains Connector	Socket Wago cod. 770-103 with strain relief housing, 3-pole, 4,00 mm ² , ratings 250 VAC, 25 A, IEC/EN 60664-1, UL 1977

PSU Module	
AC Range	90 VAC to 264 VAC (Universal Input)
Input Frequency	47 Hz to 67 Hz
Efficiency	91% typ at 230 VAC
Power Factor Correction	Yes
Input Current at Full Load	4.0 A typ at 115 VAC 2.0 A typ at 230 VAC
Power Consumption	Continuous: 360 VA Peak: 468 VA Idle: 12 VA Stand-By: 4 VA
Protection	Thermal Protection Short Circuit Protection Output Current Limiting Under-Voltage Lock Out
Main Fuse	1 × 6.3 A (slow blow)
Electromagnetic compatibility (EMC), Emissions	EN 55022, class B, FCC part 15, level B IEC/EN 61000-3-2 class B

3.0 – General Specifications

Mechanical	
Height	1174 mm
Width	122 mm
Depth	120 mm
Weight	10.3 Kg (22.7 lbs)
Cabinet	Powder Coated Aluminum Extrusion

Colour	RAL 9010
Special colour	Available for an additional charge

Temperature Range

0°C to 40°C (32°F to 102°F)

Protection Class


IP 54

Certificates


CE

- 1) Rated power measured with pink noise signal, 6 dB crest factor.
- 2) Polare response: -6 dB average 500 Hz to 8 kHz.


4.0 – Vertical Beam Pattern

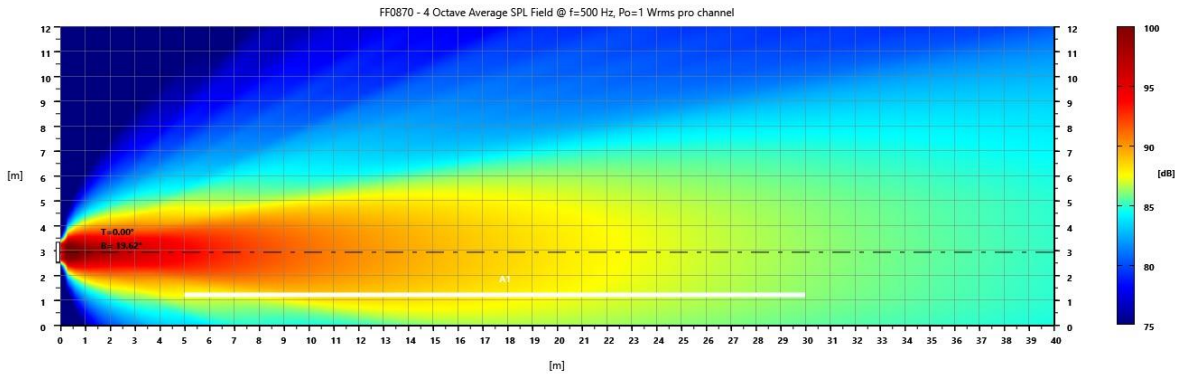


FF0870 – Vertical Beam Shape at 500 Hz, 4 Octaves average

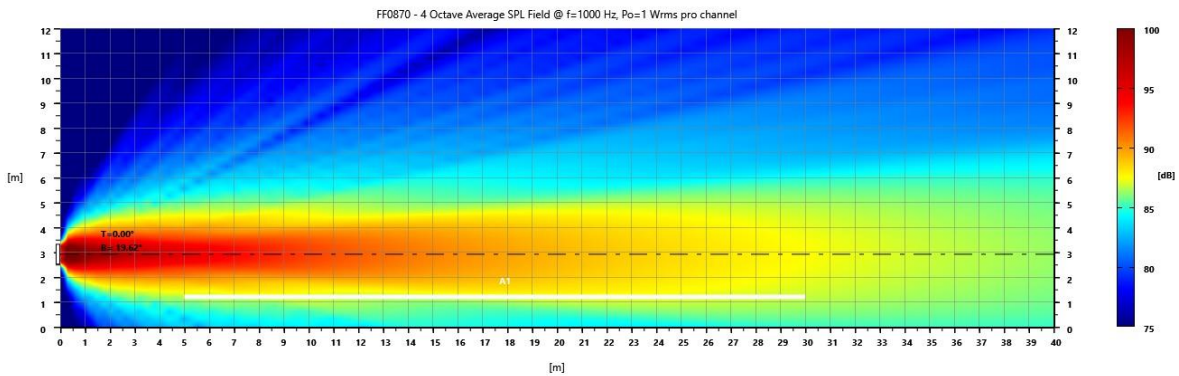

FF0870 – Vertical Beam Shape at 1000 Hz, 4 Octaves average

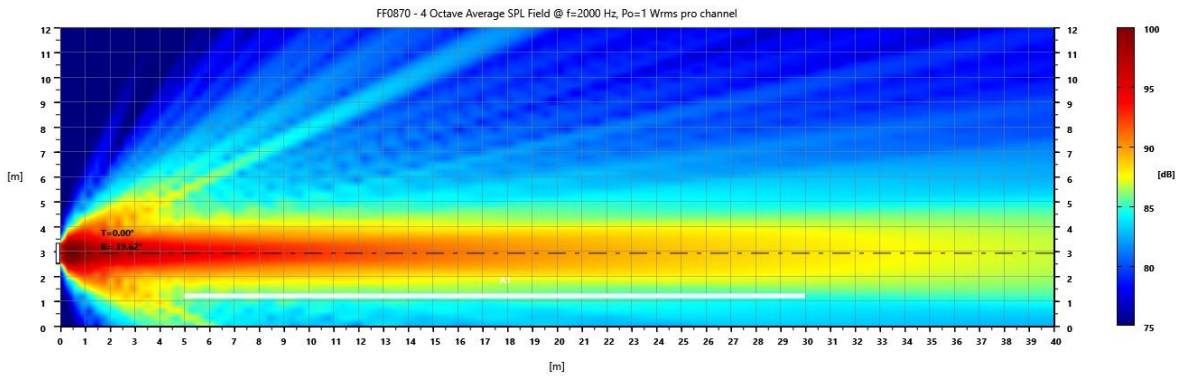


FF0870 – Vertical Beam Shape at 2000 Hz, 4 Octaves average

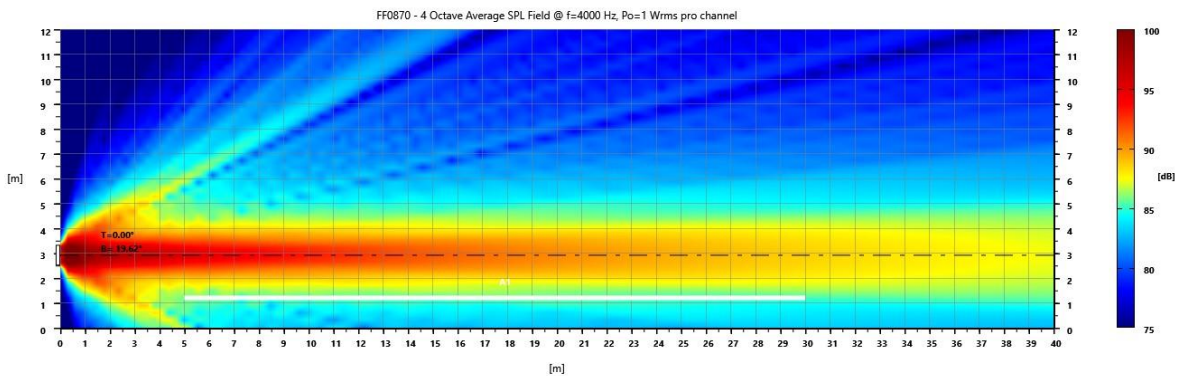

FF0870 – Vertical Beam Shape at 4000 Hz, 4 Octaves average


5.0 - Vertical Beam Width

Data Shown: FF0870 (A.V.E GmbH)
Display Parameters: Frequency: 1000Hz (1/24th Octave)

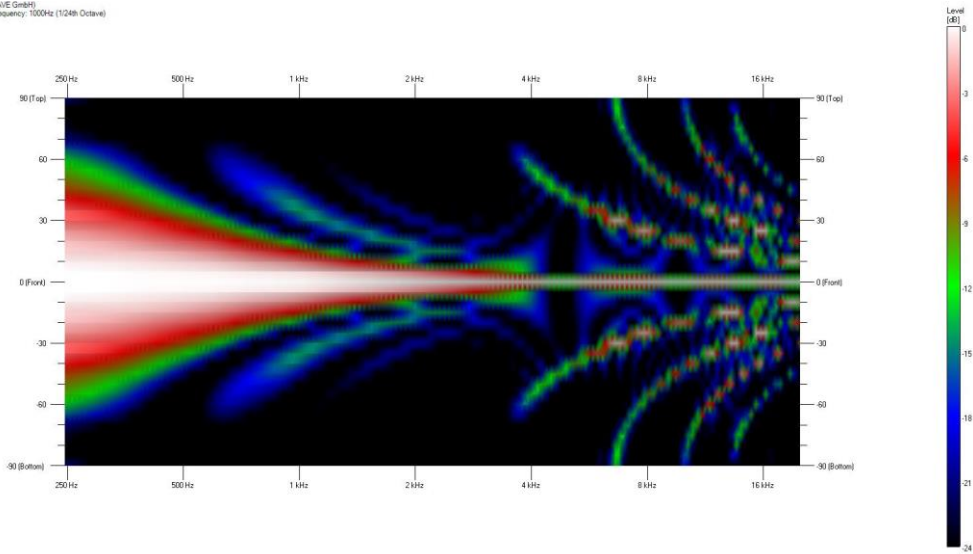


FF0870 – 2D Vertical Beam Width vs Frequency

Data Shown: FF0870 (A.V.E GmbH)
Display Parameters: Frequency: 1000Hz (1/24th Octave)

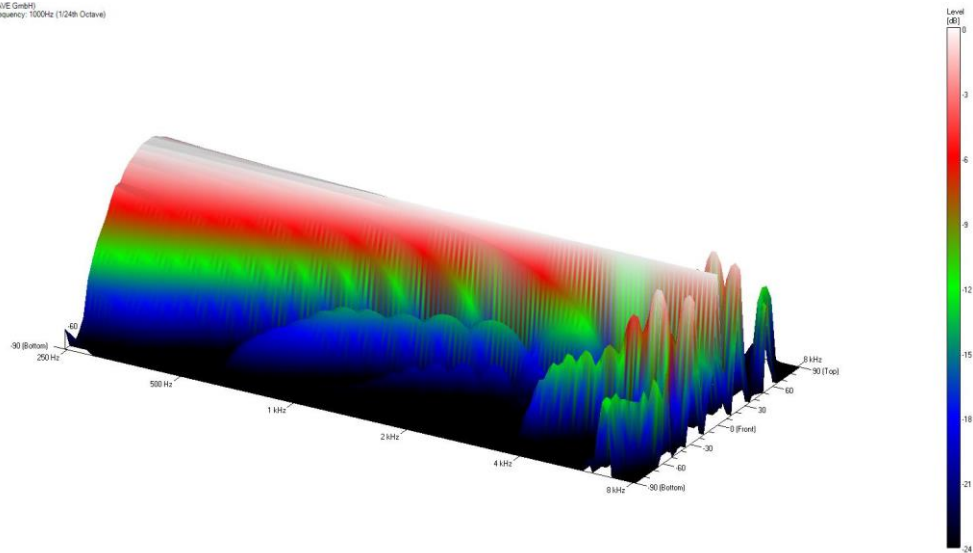


FF0870 – 3D Vertical Beam Width vs Frequency

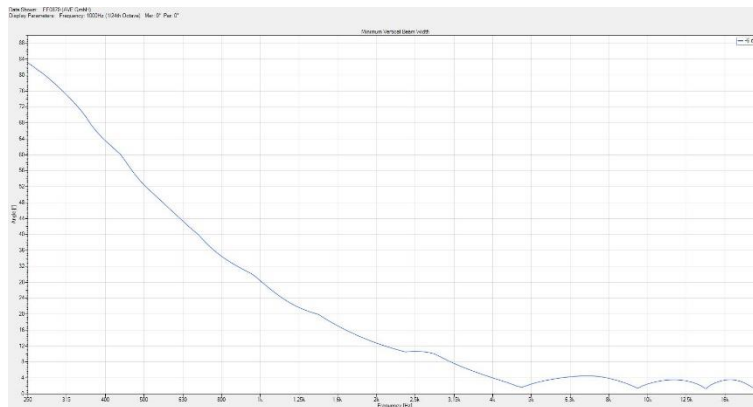


FF0870 – Vertical Beam Width vs Frequency


6.0 - Horizontal Beam Width

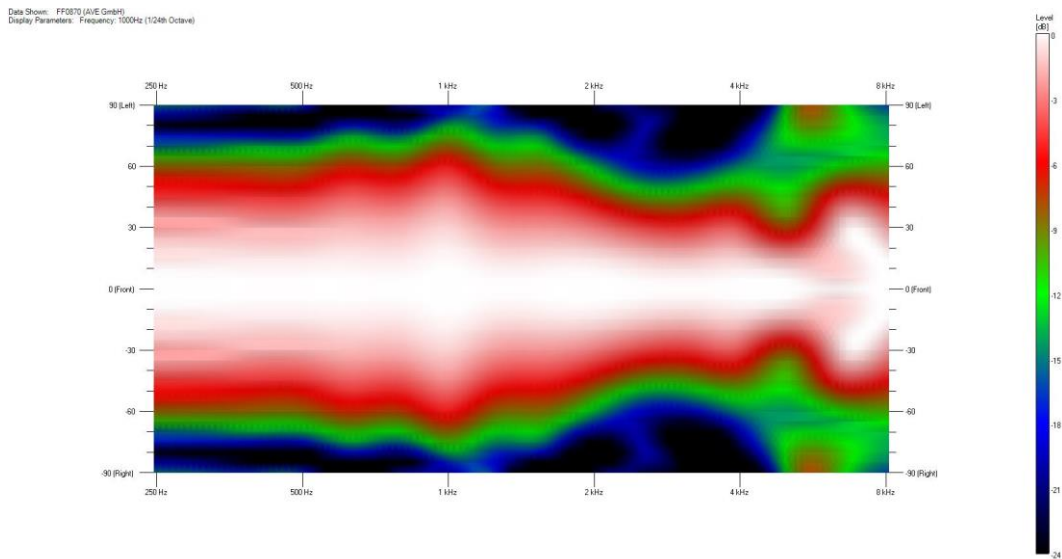

FF0870 – 2D Horizontal Beam Width vs Frequency

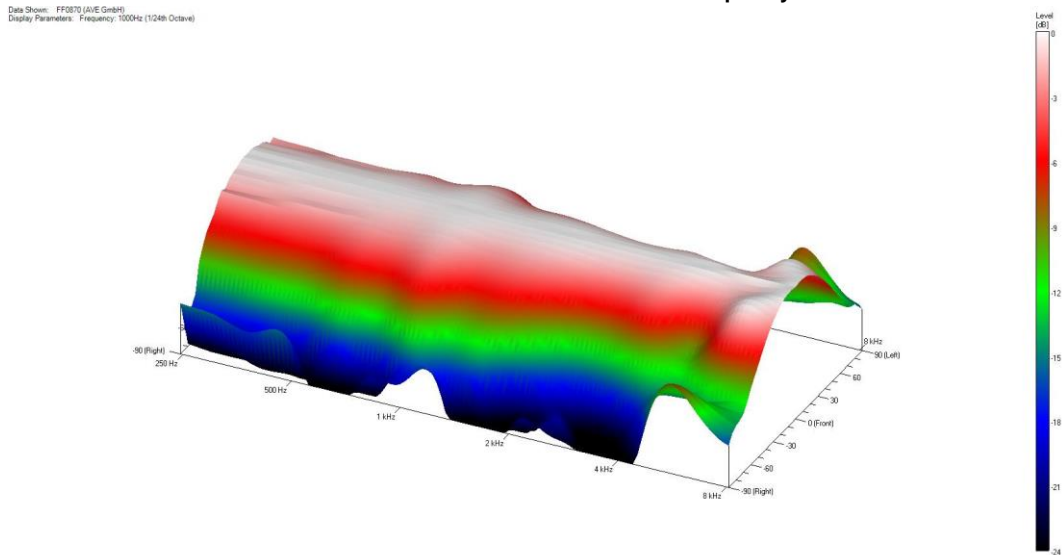

FF0870 – 3D Horizontal Beam Width vs Frequency

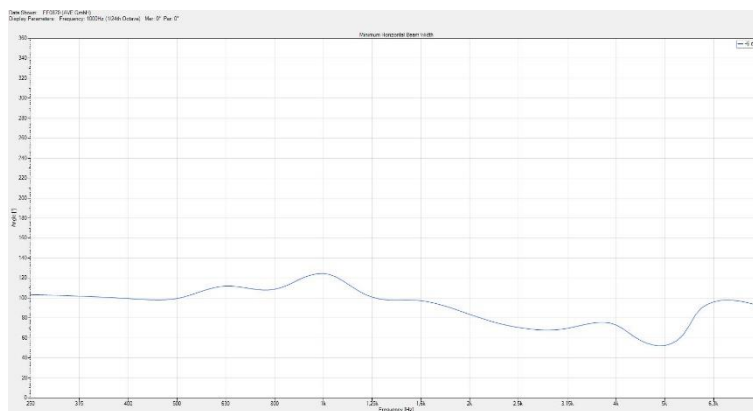

FF0870 – Horizontal Beam Width vs Frequency

Notice

ALL AVE mbH DESIGN SPECIFICATIONS, FILES, DRAWINGS, TABLES, LISTS, AND OTHER DOCUMENTS ARE BEING PROVIDED "AS IS."

AVE mbH MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NONINFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, AVE mbH assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of AVE mbH. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. AVE mbH products are not authorized for use as critical components in life support devices or systems without express written approval of AVE mbH Corporation.

Trademarks

AVE mbH, "Ascolto" and the AVE logo are trademarks or registered trademarks of AVE mbH in the Germany and other countries. Other company and product names may be trademarks of the respective companies with which they are associated.

Copyright

© 2024 AVE mbH. All rights reserved.



German Technology

Made in Germany



AVE mbH
Gustav-Rau-Straße, 6
74321 - Bietigheim-Bissingen
Germany

Telefon: +49 (0) 7142-78879-10

Fax: +49 (0) 7142-78879-18

www.ave-stuttgart.com

info@ave-stuttgart.de



FF0870 DATASHEET - V1.2.0 - 02/2024